

Boomer E3 series

Hydraulic face drilling rigs for medium to large drifts and tunnels with cross sections up to 198 m²



For power and productivity

Face drill rigs in the Boomer E3 series have extensive coverage areas of up to 198 m², making them the perfect choice for construction projects. Breaking ground is made easy thanks to a heavy-duty BUT 45 boom, which allows you to rapidly advance in the toughest rock conditions. Equipped with our award winning control system and a hydraulic rock drill specially suited to tackle any type of rock. These durable rigs make excellent investments given their long-lasting drill strings, high drilling accuracy and reduced overbreak.

⊕ Main benefits

Flexible and versatile thanks to the modular boom bracket design which aids in achieving the desired tunnel shape and the W/X-consoles for maximum width/height

Smart investment and long lifecycle with the robust BUT 45 booms and their ability to take advantage of the largest range of rock drills on the market

Safe and easy operation thanks to Epiroc's Rig Control System (RCS 5) which allows the operator to easily monitor and control all rig functions and maintain a better focus on safe drilling

FOPS certified cabin with excellent visibility for a safe, quiet and ergonomic working environment

The widest selection of rock drills available on the market with output power ranging from 16 to 40 kW

RHS E is an automatic rod handling system that features convenient and efficient probe and grout hole drilling

Service basket for smooth and easy utility jobs




Intelligent drilling

Boomer E series drill rigs are equipped with RCS 5, the latest generation of our internationally acclaimed rig control system. To optimize workflow, rigs have self-diagnostic capabilities while usability is enhanced by easy access to on-board manuals, organized information and rig controls.



+ Smart assistance functions

Boomer E3 rigs can be equipped with a wide range of operator assistance functions to augment their intelligence and efficiency. Options include automatic boom positioning (ABC Total), Total Station Navigation and an automatic rod handling system (Auto RHS E).

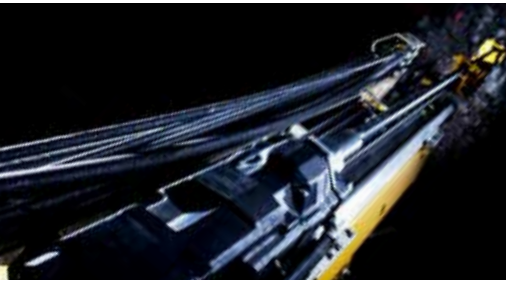

+ BUT 45 for tremendous strength and productivity

Rigs in the Boomer E series feature the market-leading BUT 45 boom system. The boom is easily positioned and steadily stays in place during high-impact drilling to help you to achieve desired advance rates in your local ground conditions to boost your productivity. The robust design also allows carriage of additional options to further increase your rig's versatility.



+ Automatically safer and more efficient

Eliminate the need for workers to manually couple and decouple threaded joints to extend drill rods with Auto RHS E, our fully automatic rod handling system. Auto RHS E can be used to efficiently drill grout and probe holes up to 30 meters deep.



A comprehensive service offering

Even the best equipment needs to be serviced regularly to make sure it sustains peak performance. An Epiroc service solution offers peace of mind, maximizing availability and performance throughout the lifetime of your equipment. We focus on safety, productivity and reliability.

By combining genuine parts and an Epiroc service from our certified technicians, we safeguard your productivity – wherever you are.

Technical specifications

● - Standard ○ - Option
A = Boomer WE3 B = Boomer XE3

Drilling system	A	B	Electrical system	A	B
COP 1800-series	●	●	Total installed power 237 kW, Main motors, Sf 115 3x75 kW	●	●
COP 2200-series	○	○	Total installed power 297 kW, Main motors, Sf 1.3 3x95 kW**	○	○
COP 3000-series			Total installed power 342 kW, Main motors, Sf 1.45 3x110 kW***	○	○
COP 4000-series	○	○	Voltage 380-1 000 V 50/60 Hz	●	●
COP MD20-series			Voltage 690-1 000 V 50/60 Hz**	○	○
Hole blowing kit	●	●	Voltage 1 000 V 50 Hz***	○	○
Water mist flushing, external water and air supply*	○	○	Soft start (380-1 000 V)	○	○
Rock drill lubrication warning kit	●	●	Starting method, star/delta (380-690 V)	●	●
* Not in combination with COP 3038/COP 4038			Starting method, direct start (1 000 V)	●	●
			Transformer 12 kVA	●	●
Boom	A	B	Electronic overload protection for electric motors	●	●
BUT 45 L	●	●	Digital voltmeter/amperage meter in electric cabinet	●	●
Service platform	○	○	Percussion hour meter on operator display	●	●
Swingable basket for service platform	○	○	Phase sequence and ear fault indicator	●	●
Retractable protective roof for service platform	○	○	Cable reel, diameter 1 600 mm	●	●
Automatic lubrication for positioning unit	○	○	Electric outlet for accessories, 16 A (CE)/32 A (CE) (380-690 V)	○	○
			Extra transformer 3-phase, 15 kVA (230/400 V outlet) (690-1 000 V)	○	○
Feed	A	B	PC5 Plug	○	○
BMH 6800-series 14 ft, 16 ft, 18 ft, 20 ft, 21 ft	●	●	Battery charger 2x60 A	●	●
Telescopic feed BMHT 6000-series (max 18 ft)	○	○	Dual controls for cable reel	●	●
Extension drilling set BSH 110 (BMH feeds only)	○	○	Stainless steel electrical enclosure	○	○
Rod Handling System E, RHS E (BMH feeds only)	○	○			
			* Depending on selected rock drill		
AIR/watersystem	A	B	** When equipped with COP3038		
Hydraulically driven screw compressor Atlas Copco GAR 5	●	●	*** When equipped with COP4038		
Hydraulically driven screw compressor Atlas Copco GAR 30*	○	○			
Electrically driven screw compressor Atlas Copco GAR 30*	○	○			
Hydraulic water booster pump, max capacity at 15 bar boost 300 l/min. Minimum water inlet, 2 bar at 200 l/min**	●	●			
Hydraulic water booster pump, max capacity at 30 bar boost 400 l/min. Minimum water inlet, 2 bar at 400 l/min**	○	○			
Water hose (Ø2.0 inch 70 m)	●	●			
Water hose (Ø2.5 inch 90 m)	○	○			
* Might require a larger electrical motor ** Depending on selected rock drill					
			Carrier	A	B
Hydraulic system	A	B	Deutz TCD 2012 LO6, Stage IIIA/ Tier 3, 155 kW	●	●
Low oil level indicator	●	●	Deutz TCD 6.1 LO6, Stage V/ Tier 4F, 180 kW	○	○
Oil temperature gauge on oil tank, electronically supervised	●	●	Deutz TCD 6.1 LO6, CN4, 180 kW	○	○
Filtration 16 µm	●	●	Four-wheel drive	●	●
Oil filter indicator	●	●	Electric system 24 V	●	●
Extra filtration package for water- and fine particle removal	○	○	Batteries 2x125 Ah	●	●
Mineral hydraulic oil	●	●	Jump start receptacles	○	○
Biodegradable hydraulic oil	○	○	Hose/cable guiding at water/cable reel	●	●
Electrical oil filling pump	●	●	Manual differential lock on axles, limited slip on front axels	●	●
Heater kit for hydraulic oil tank, diesel engine and electric motors	○	○	Tires 14.00xR24	●	●
Ni-Cr plated piston rods (limitations exist)	○	○	Clearance outside axles 15° rear, 15° front	●	●
			Tramming lights 8x40 W LED, 24 V DC	●	●
Control system	A	B	Working lights 4x150 W+6x80 W	●	●
Epiroc Rig Control System (RCS 5)	●	●	Illuminated stairs LED	●	●
Two operator panels (one sitting and one standing)	○	○	Fuel tank, volume 125 l	●	●
Advanced Boom Control (ABC) Regular	●	●	Central lubrication system	●	●
Advanced Boom Control (ABC) Total	○	○	Fire suppression system ANSUL (manual or automatic)	○	○
Automatic Rod Handling (RHS E)	○	○	Fire suppression system FORREX (automatic)	○	○
Measure While Drilling (MWD)	○	○	Rig washing kit	○	○
Underground Manager PRO (PC software)	●	●	Manual lubrication kit	○	○
Underground Manager MWD (PC software) for analysis of drill data	○	○	Boot washing kit	○	○
Bolt view	●	●	Hydraulic outlet for charging with Mini SSE	○	○
Water loss measurement instruments installed in service platform	○	○	Holder for spare drill rods	○	○
Rig Acces Control	●	●			
Rig Remote Access (RRA), LAN or WLAN connection	○	○			
Tunnel Profiler	○	○			
Total Station Navigation	○	○			
CertiQ Professional	○	○			
Dynamic tunneling package	○	○			

Technical specifications

● - Standard ○ - Option
A - Boomer WE3 **B** - Boomer XE3

Cabin	A	B
FOPS certified cabin	●	●
Mediaplayer	○	○
12 V outlet for communication radio	○	○
Electrical heater, 1.2 kW, 230 V (CE)	○	○
Reversing camera with monitor	○	○
Air conditioning unit	●	●
Heating function for air conditioning (water transferred)	○	○
Joystick-controlled spotlights left and right, 70 W	○	○
Front window, 24 mm	○	○
Hydraulic cabin lift system, 1 100 mm	●	●

Drifter rods

Rock drill	Rod	Min. hole diameter (mm)
COP 1838 COP 2238	SR35-H35-T38 Speedrod	38
	SR35-H35-T38	38
	SR35-R39-T38	38
	SR35-R39-T38 Speedrod	38
COP 3038 COP 4038	SR35-H35-T38	45
	SR35-R39-T38	45

Extension rods for injection drilling/RAS

Rock drill	Rod	Min. hole diameter (mm)
COP 1838 COP 2238	Rnd 32 Speedrod	38
	Rnd 39 Speedrod	38
COP 3038 COP 4038	Rnd 39 Speedrod	64

Shank adapters

Rock drill	Thread	Min. hole diameter (mm)
COP 1838 COP 2238	R38	38
	T38	38
	R32*	38
COP 3038 COP 4038	TC42	45

* Intended for RAS and extension drilling with BSH 110

Couplings

Rock drill	Thread	Diameter (mm)	Length (mm)
COP 1838 COP 2238	R38	55	170
	T38	55	170
COP 3038 COP 4038	TC38	57	175

Recommended cable size and length

Voltage	Type	Dimension (mm ²)	Diameter (mm)	Length (m)	Rock drill
380-500 V	Buflex	3x240+3G35	64	100	COP 1838/2238
550 V	Buflex	3x185+3G25	56	100	COP 1838/2238
660-690 V	Buflex	3x150+3G16	52	140	COP 1838/2238
660-690 V	Buflex	3x240+3G25	64	100	COP 3038
1 000 V	Buflex	3x70+3G10	40	250	COP 1838/2238
1 000 V	Buflex	3x120+3G16	46	195	COP 3038
1 000 V	Buflex	3x180+3G16	56	110	COP 4038

Recommendations are given for surrounding temperature of 40° C and up to a height of 2 000 m

Noise and vibration

Operator sound pressure level in cabin, drilling, free field (ISO 11201)	75±3 dB(A) re 20 uPa
Operator sound pressure level working close to machine, drilling, free field	105±6 dB(A) re 20 uPa
Operator sound pressure level working close to machine, drilling, free field*	107±6 dB(A) re 20 uPa
Operator sound pressure level working close to machine, drilling, free field**	109±6 dB(A) re 20 uPa
Sound power level (ISO 3747), drilling, free field	125±3 dB(A) re 1 pW
Sound power level (ISO 3747), drilling, free field*	127±3 dB(A) re 1 pW
Vibration levels seated, drilling (ISO 2631-1)	0.07±0.07 m/s ²
Vibration levels standing, drilling (ISO 2631-1)	0.07±0.07 m/s ²

* Equipped with COP 3038

Dimensions	A	B
Width	2 926 mm	2 926 mm
Height with cabin	3 664 mm	3 656 mm
Height, cabin up	4 756 mm	4 756 mm
Length, tramming	17 494 mm BMH 6920	17 544 mm BMH 6820
Ground clearance	449 mm	450 mm
Turning radius outer/inner	11 900/6 300 mm	11 900/6 300 mm


Gross weight (depending on configuration)

Rig type	Total	Boom side	Engine side
Boomer WE3	47 000 - 53 000 kg	29 600 kg	14 900 kg
Boomer XE3	47 000 - 53 000 kg	32 000 - 40 000 kg	12 000 - 16 500 kg



Tramming speed

On flat ground (rolling resistance 0.05)	>15
On incline 1:8	>5


Technical specifications

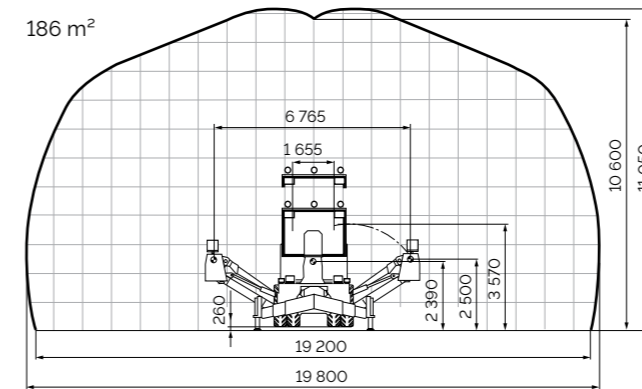

Boomer WE3: Left coverage area, right measurements.

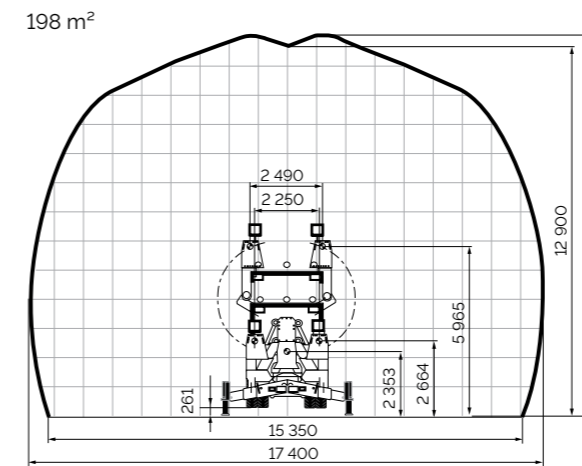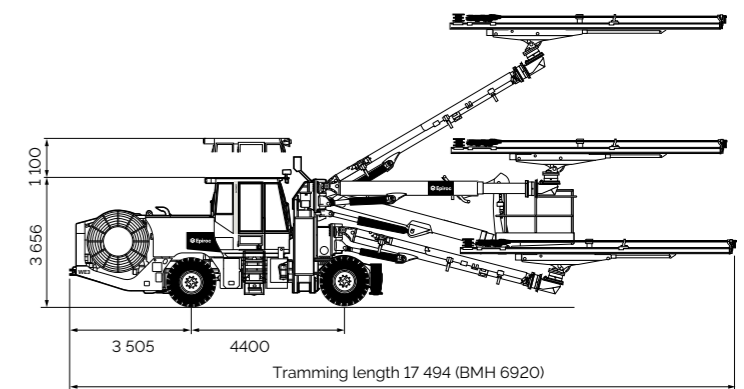

Boomer XE3: Left coverage area, right measurements.

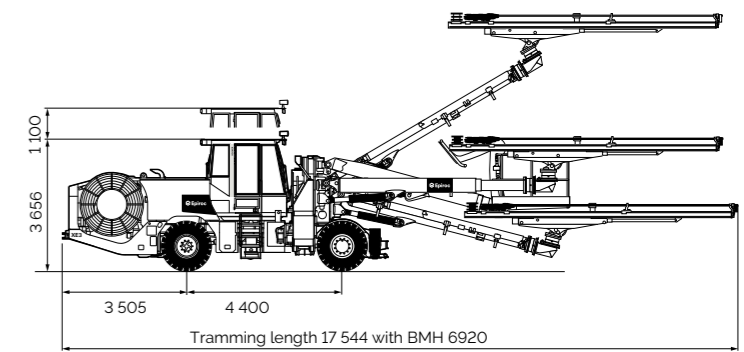

9869 0287 01_2025-01 Örebro, Sweden. Legal Notice © Copyright 2025 Epiroc Rock Drills AB, Örebro, Sweden. Any unauthorized use or copying of the contents or any part thereof is prohibited. Illustrations and photos may show equipment with optional extras. No warranty is made regarding specifications or otherwise. Specifications and equipment are subject to change without notice. Consult your Epiroc Customer Center for specific information.



United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.
[epiroc.com](https://www.epiroc.com)

