Terrah TS100 SCL

Underground utility vehicle with a scissor lift platform, offering an elevation height of 3.5–5 meters



Elevating the performance

Terrah TS100 SCL is an underground utility vehicle with a rear-mounted scissor lift platform. It has a high lifting capacity of 3 tonnes and a maximum platform height of 5 meters, making it ideal for underground operations. Thanks to the robust design and multiple safety systems, safe and effective work at height can be performed. In addition, the Terrah TS100 SCL scissor lift can be fitted with an articulated crane and additional accessories to boost your productivity.



Main benefits

Safety – the barricaded platform offers a secure working area with safety features including the anti-crush system, intuitive controls with a dead man's switch, ground-level emergency lowering, and scissor stop blocks preventing unexpected platform movements.

Productivity – with minimal setup time and a large area for transporting equipment, the high-capacity platform can carry 6 tonnes and be effectively utilized for multiple tasks.

Reliability – engineered for robustness and reliable operation at significant heights, the platform lifts up to 3 tonnes and maintains a consistent elevation speed powered by two single-stage cylinders.

Built to deliver. Designed to adapt.

The Terrah Series utility vehicles are designed to maximize modularity, productivity and safety in small to medium-sized underground mining and civil construction tunnels. Built on a legacy of reliable, durable products now enhanced with Epiroc technology, the Terrah Series supports customers throughout their operations.




+ Safety at its core

Designed with operator safety and well-being in mind, the operator's compartment combines ROPS/FOPS protection, comfort, and functionality. Thanks to advanced suspension seats and climate control, operator fatigue can be reduced, while excellent visibility supports safer interactions and precise machine control.



+ Performance that saves time

Driven by a high-performance drivetrain, the Terrah Series delivers great capability, enhanced control, and improved operational efficiency through reduced ramp traveling time. The fully automatic drivetrain ensures consistent performance across diverse underground conditions, while the integrated exhaust brake enhances downhill speed control and reduces brake wear.

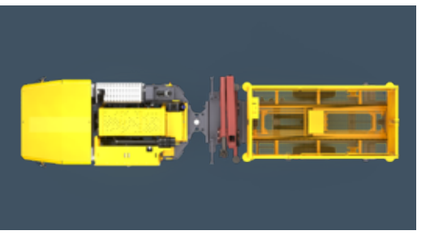

+ Reliability at scale

The Terrah Series utility vehicles are engineered for reliability and high availability, combining robust components, advanced data logging, and an integrated onboard monitoring system to minimize the risk of breakdowns and maximize uptime. When maintenance is required, the technician-friendly service bay enables routine tasks to be done safely, quickly, and easily.



A comprehensive service offering

Even the best equipment needs to be serviced regularly to make sure it sustains peak performance. An Epiroc service solution offers peace of mind, maximizing availability and performance throughout the lifetime of your equipment. We focus on safety, productivity and reliability.

By combining genuine parts and an Epiroc service from our certified technicians, we safeguard your productivity – wherever you are.

Technical specifications

Engine

	Standard	Alternative*
Brand/ model	Cummins QSL9	Cummins QSL9
Power at sea level	213kW @ 2000rpm	213kW @ 2000rpm
Cooling	Liquid (glycol/water)	Liquid (glycol/water)
Engine control	EU Stage IIIA	EU Stage V

All engines are CANMET and MSHA, USA approved.
*Please note! Require ultra low sulfur diesel and low ash engine oil

Exhaust System

EU Stage IIIA	EU Stage V
Catalytic exhaust gas purifier	Diesel Exhaust Fluid (DEF)
Fume diluter	Selective Catalytic Reduction (SCR)
	Diesel Particulate Filter (DPF)

Transmission

Dana T14 series power shift transmission
Torque converter lockup
Automatic gear shifting

Axles

Brand/ model	Dana 113
Differential, front	Open
Differential, rear	Open

Brakes

Wetted fully enclosed immersed brake disks
Spring Applied Hydraulic Released (SAHR) fail safe brakes - park/ emergency
Manually activated park/ emergency brake valve
Hand pump for releasing brakes
Brake-by-wire service brake

Tires

Tire size front and rear	12.00 x 20
Air-filled tires	

Steering

Frame articulation ± 40°

Operator's compartment

FOPS/ ROPS certified
Two person (1 x driver and 1 x passenger)
Windows, front window washers and wipers
Thermal and sound insulation
Temperature and fan speed adjustable air conditioner with heater
Steering wheel
Air suspension and height adjustable operator's seat
Driver seats fitted with 3-point seat belt
Rear view mirrors
Cup holder
Flashlight with charger
External camera

Specifications

Capacities	
Tramming capacity	6 000 kg
Lifting capacity	3 000 kg (3.5 m) / 2 000 kg (5 m)
Weight*	
Weight, empty	11 750 kg
Axle load, front (at GVW)	7 250 kg
Axle load, rear (at GVW)	14 500 kg

*Weights are approximate and given with filled fluids and a standard configured vehicle.

Main frame

Steel fabrication construction	
Bolt-on operating cabin	
Front axle oscillation of 5° both sides	
Integral hydraulic and fuel tanks	
Two double acting hydraulic steering cylinders (pull/push)	
Articulation lock	
3-point of contact for boarding/exit	
Front towing attachment	
Central manual lubrication system	
2 x stop blocks (wheel chocks)	
Propshaft slings, protection	
Tank level sight glasses	
Rear towing attachment with towing pin	
Platform height	3 500 mm
Basket side height	1 000 mm
Anti-crush system	

Fuel

Fuel tank size	200 liter
Compatible with HVO100.	

Control system

Terrah PLC controller
Robust water-resistant digital display
On-screen push button interface
Electronic pressure sensors
Speedometer
Overspeed control
Decline speed control
Delayed engine shutdown
Inclinometer
Door Open Brake Applied (DOBA)
Neutral gear brake (NBA)
Seat belt switch interlock



Technical specifications

Electrical system

System voltage	24V
Battery	2 x 100 Ah
Alternator	180 Amps
Lockable ignition switch	
Inlet plug for jump start	
Front grounding straps: chain	
12V, 20 A power supply in cabin with socket and connector	
Epiroc signature lights: front	
Epiroc signature lights: rear	
Engine starter isolation switch	
Lockable double pole battery isolator switch	
Directionally controlled drive lights	
Steering column control	
Amber warning lights	
Reverse warning light and alarm	
Rear service brake warning lights	
Orange turning direction indicator lights	
Red and green marker lights	

System

3 x emergency stop buttons
2 x 9 kg handheld fire extinguishers

Hydraulic system

Gear pumps
System pressure up to 350 Bar
11 µm return line filter

Measurements

Noise
Vibration
Visibility

Digital product

Fleet monitoring with Fleet+

Options

Axles

Differential front	No-spin

Tires

Polyurethane foam filled tires

Operator's compartment

Canopy (no windows and no air conditioner)
Window protection

System

ANSUL manual dry fire suppression system
ANSUL FIRECHECK automatic dry fire suppression system

Main frame

Central automatic lubrication system	
Wiggins fast fuel fill	
Wiggins central service points	
Platform height	5 000 mm

Control system

Collision Avoidance System (CAS) Interface
Secondary steering and braking system
Machine speed limit

Crane (available with 3.5 m platform)

Palfinger, PK6500, 1 030kg @ 5.6m


Grade performance

Standard configuration, unloaded												
%	Grade	0	2	4	6	8	10	12	14	16	18	20
km/h	1st gear	4,6	4,6	4,6	4,6	4,6	4,6	4,6	4,5	4,5	4,5	4,5
	2nd gear	9,5	9,4	9,4	9,4	9,4	9,3	9,3	9,3	9,3	9,3	9,2
	3rd gear	16,5	16,4	16,3	16,3	16,2	16,1	16,0	16,0	15,9	15,8	15,3
	4th gear	29,0	28,8	28,5	28,3	28,1	26,9	25,7	24,5	23,3	22,1	21,1
Standard configuration, loaded												
km/h	1st gear	4,6	4,6	4,6	4,5	4,5	4,5	4,5	4,5	4,5	4,5	4,5
	2nd gear	9,4	9,4	9,3	9,3	9,3	9,2	9,2	9,1	9,1	9,0	8,6
	3rd gear	16,4	16,3	16,1	16,0	15,9	15,0	14,3	13,6	12,9	12,2	11,7
	4th gear	28,7	28,3	26,9	24,6	22,4	20,5	18,5				


Technical specifications

Measurements


The dimensional drawings are shown in millimeters, and are based on the standard vehicle configuration fitted with the optional crane.

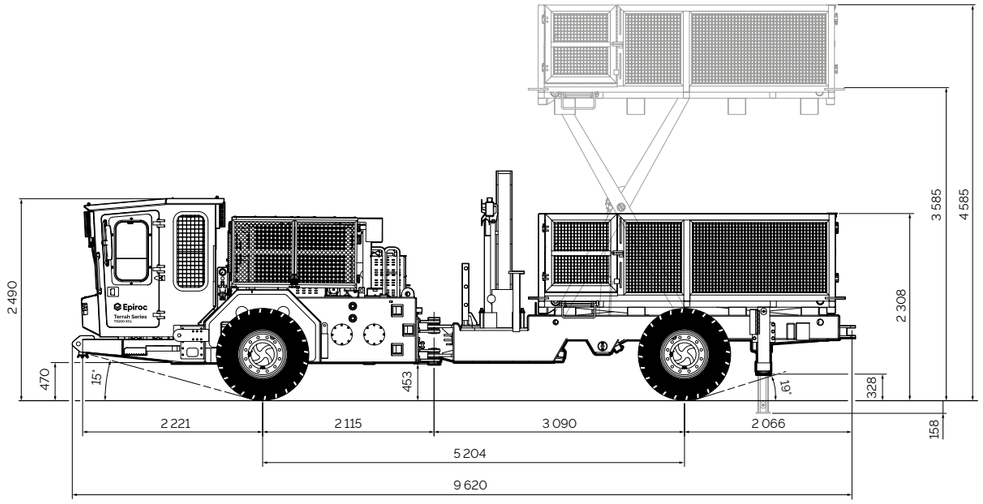


Left side view of Terrah TS100 SCL



Front view of Terrah TS100 SCL



Rear view of Terrah TS100 SCL

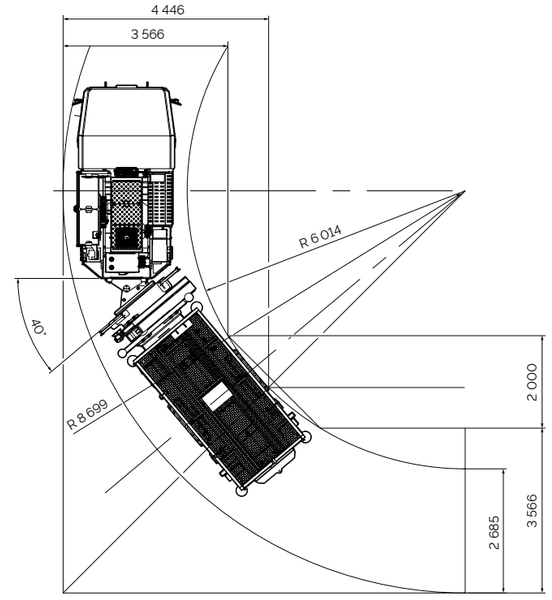

Turning radius of Terrah TS100 SCL

9869 0259 01d 2026-09 Örebro, Sweden. Legal Notice © Copyright 2026. Epiroc Rock Drills AB, Örebro, Sweden. All product names in this publication are trademarks of Epiroc. Any unauthorized use or copying of the contents or any part thereof is prohibited. Illustrations and photos may show equipment with optional extras. No warranty is made regarding specifications or otherwise. Specifications and equipment are subject to change without notice. Consult your Epiroc Customer Center for specific information.

United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.

epiroc.com

Epiroc